

6kW Smart Rack Load Bank

About product

The 6kW connected rack load bank is used as a server simulator to test the resilience of electrical & thermal infrastructures in white halls.

The 19" load bank integrates directly into the data center rack cabinet and precisely simulates electrical & thermal impacts of the servers.



Description Technique

Info	Value
Nominal Power	6kW
Max voltage	230 V- Single Phase – 50/60Hz 400V if 3 banks
Resolution	0.5 kW
Steps	2x1kW, 2x2kW
Power Supplies	Redundancy (A – B)
Average Delta T°	Fixed or selectable between 9° C and 26° C
Air Flow (motor speed)	Variable – max 3250 m³/ h
Ventilation	Forced variable fans
Security	Temperature light
Noise	85 Db

Info	Value
Height	12U (533mm)
Width	400 mm
Depth	19" (486.2 mm)
Installation	Rack Shelf
Weight	20 kg
IP	IP 23
Design	Aluminium Epoxy
Handling	Lether handle/ design thinking
Manufacturing	Made in France by Metal Deploy Resistor
Software	Monitoring reporting (U, I, P, In/Out °C, Δθ) + data record + csv file

6kW Smart Rack Load Bank

Product accessories

Cables

- C19-C20 / C19-C14 / C19-UTE
- Cable RJ45 to connect the load banks

Selbs 19 or 21 inches


Temperature sensors (datalogger)

Rentalload software for smart load banks updated with windows (vinjioxl) license provided by Rentalload

Swich for connection of several banks



Connection

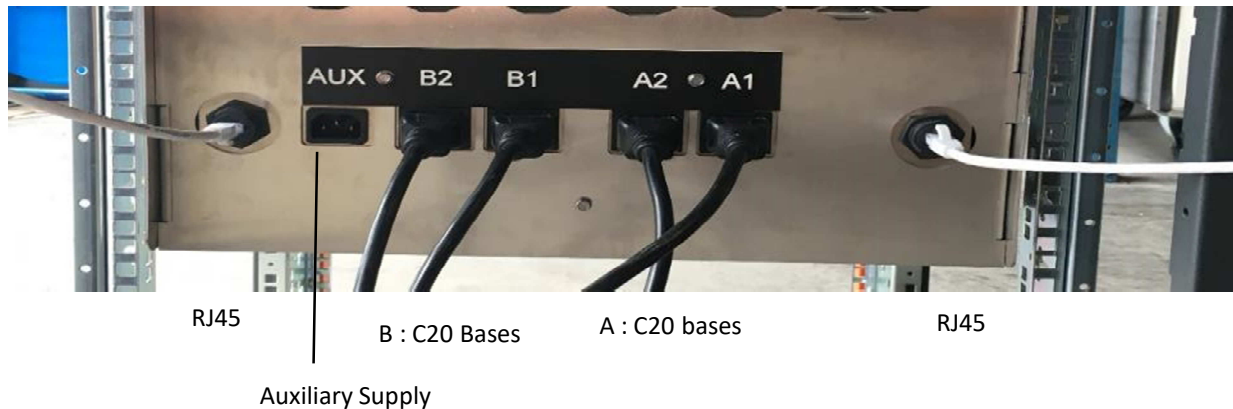

The local monitoring software from Rentalload

- Real-time data view
- Local connection

